



Enhanced Patient Care

TECHNICAL SPECIFICATIONS DATA SHEET

Eflo-6



Happier Living Everyday

Product Specifications

Physical Specifications

Package dimensions	
Volume	1570×975×750 mm ³ (H×W×D)
Gross weight	Approximately 135 Kg
Net weight	Approximately 80 Kg
Top shelf	
Area	530×400 mm ² (L×W)
Weight limit	Approximately 34 Kg (75 lb)
Work surface	Retractable tray, Optional Side flip up tray
Drawer	Two
Volume	150×335×310 mm ³ (H×W×D)
Vaporizer station	
Number of stations	Two
Type	Selectatec® compatible with Inter lock. Prevents simultaneous activation of more than one vaporiser at a time.
Casters	
Diameter	100mm
Brakes	Single foot lever locks and unlocks for two front casters
Material	
The framework is made of metal and ABS, wherein the metal is galvanized A3, and it passes 48h salt spray test.	

Electrical Specifications

Power supply	
Power input	100 to 240 VAC, 50/60 Hz, 6.5A (Max.)
Power cord	5 meter length
Fuse	T10AL/250V
Standard	CE
Auxiliary power outlets (Optional)	
Number of outlets	Three
Power output	100 to 240 VAC, 50/60 Hz, 1.5A×3
Fuse	T2AL/250V
Standard	CE
Battery	
Type	Lithium
Number of batteries	One piece
Backup time	Minimum 120 Minutes, Maximum up to 360 minutes with a fully charged battery
Charging time	Approximately 8 hours
Communication port	
RS 232,PS2 ,Optional Ethernet Port	

Pneumatic Specifications

Gas supply	
Pipeline	O ₂ , N ₂ O. NIST Type
Pressure	280 to 600 kPa
Cylinder Yokes	Pin Indexed. For O ₂ & N ₂ O. With Filter and Check Valve.
Auxiliary O ₂ flowmeter (Optional)	Flow rate 0-15 L/min

Oxygen flush	25~75L/min
Gauges	Total 4 Nos. Two Gauges for Pipeline and 2 Gauges for Cylinder
Auxiliary Common Gas Outlet (ACGO)	Switchable outlet. ISO 22mm OD and 15 mm ID
Flowmeters	
Type	O ₂ , N ₂ O mechanical flowmeters. Two tube of O ₂ and two tube of N ₂ O. Flow range: 0.05 to 1 L/min and 1 to 10 L/min
Hypoxic guard system	Mechanical Gear System. Provide minimum 25% concentration of Oxygen in O ₂ / N ₂ O gas mixture
Absorber	
Volume	385×502×335 mm ³ (H×W×D)
Net Weight	Approximately 6 Kg
Bellows Volume	1500 ml - Universal Bellows, Latex Free
Absorber Volume	Manual Mode - 1.2 L Vent Mode - 2.95 L
APL Valve	2 to 70 cm H ₂ O
Pressure Manometer	Pneumatic gauge measures breathing circuit pressure with range of -20 to 100 cm H ₂ O
Absorber leakage	The absorber pressure under 3 kPa, then the leakage is not more than 150 mL/min
Connection	Inspiratory port: standard outside diameter 22 mm, inner diameter 15 mm, cone-shaped connector; Expiratory port: standard outside diameter 22 mm, inner diameter 15 mm, cone-shaped connector; Manual breathing bag: outside diameter 22 mm.
Absorber canister	Single, approximately 1.5 L (1.35 Kg) with bypass
Absorber Heating	Avoids water condensation
Bag/Vent switch	Turns the ventilator on or off

Anaesthesia Ventilator

Ventilator specification	
Driving mode	Pneumatically Driven & Electronically controlled
Driving gas	Oxygen
Driving gas pressure	0.28 ~ 0.6 Mpa
Driving gas flow rate	≤120 L/min
Ventilation mode	VCV, PCV, Manual
Screen Size	8.4 inch
Resolution	800×600
Graph	Pressure-time, Flow-time, Volume-time.
Compensations	Fresh Gas Compensation, Compliance Compensation, Altitude Compensation, Mix gas Compensation
Ventilator parameter	
Tidal volume range	40 to 1500 mL

Product Specifications

Tidal volume incremental settings	40 to 100 mL (increments of 5 mL)
	100 to 1000 mL (increments of 10 mL)
	1000 to 1500 mL (increments of 50 mL)
Frequency range	4 to 100 bpm (increments of 1 bpm)
Inspiratory/ Expiratory ratio range	4:1 to 1:8 (increments of 0.5)
Inspiratory time range	0.1 to 10 s (Increments of 0.1 s)
PEEP	OFF, 4-30 cm H ₂ O (Increments of 1 cm H ₂ O)
Inspiratory hold percent range	OFF, 5% to 60% (increments of 5%)
Inspiratory pressure range	5 to 70 cm H ₂ O (increments of 1 cm H ₂ O)
Inspiratory pressure limit range	0 to 70 cm H ₂ O (increments of 1 cm H ₂ O)
Ventilator control	
Self Test	Start up test, Leak test (Manual and Auto), Compliance test, FiO ₂ calibration
Knob	One knob, it can be turned clockwise / anticlockwise and pressed down
Keys	11 keys: Alarm Silence, Alarm Settings, Ventilation setting, System Settings, System Log, Start/ Standby and six parameters setting keys.
Ventilator monitoring	
Inspiratory tidal volume range	0 to 2000 mL
Expiratory tidal volume range	0 to 2000 mL
Minute volume range	0 to 60 L
Frequency range	0 to 100 bpm
Inspiratory/ expiratory ratio range	4:1 to 1:8
Peak pressure range	-12 to 100 cm H ₂ O
Mean pressure range	0 to 100 cm H ₂ O
Inspiratory plateau pressure range	0 to 100 cm H ₂ O
Inspiratory O ₂ % range	21% to 100%
Compliance range	0 to 200 mL/cm H ₂ O
Resistance range	0 to 200 cm H ₂ O/ (L/S)
Alarm settings	
Tidal volume range	High: 40 to 1500 mL, OFF Low: OFF, 40 to 1500 mL
Minute volume range	High: 1 to 40 L, OFF Low: OFF, 1 to 40 L
Frequency range	High: 1 to 100 bpm, OFF Low: 0 to 100 bpm
Inspiratory O ₂ % range	High: 21% to 100%, OFF Low: OFF, 21% to 100%
Airway pressure range	High: 1 to 100 cm H ₂ O Low: 0 to 99 cm H ₂ O
High continuous airway pressure	Alarm when airway pressure exceeds cm H ₂ O for 15 seconds
Negative pressure	Alarm when airway pressure exceeds -10 cm H ₂ O

Apnea	Alarm when no breath within 10 to 40 seconds (adjustable)
O ₂ failure	Alarm when supply pressure of O ₂ is less than 280 kPa
Mains failure	Alarm when main power fails
Low Battery	Alarm when battery can be used for approximately 10 minutes
Alarm mute	Less than 100 seconds
SpO₂ monitoring (Optional)	
SpO ₂ module includes SpO ₂ sensor for monitoring SpO ₂ of patient and triggering alarm when measured values exceed the preset alarm values.	
SpO ₂ monitoring range	0 to 100%
PR monitoring range	30 to 250 bpm
SpO ₂ alarm range	70% to 99%
Gas analyzer (Optional)	
PHASEIN mainstream CO ₂ module monitors concentration of CO ₂ in inspiratory and expiratory phases	
Monitoring range	0~114 mmHg
PHASEIN IRMA AX+ mainstream gas analyzer analyzes agent ID automatically and monitors concentration of it.	
Net weight	30g
Halothane	0~8 vol%
Enflurane	0~8 vol%
Isoflurane	0~8 vol%
Desflurane	0~22 vol%
Sevoflurane	0~10 vol%


Vaporizers (Optional)

Penlon Sigma Delta	
Anesthetic Agent	Sevoflurane, Isoflurane, Halothane, Enflurane
Filler Type	Key fill, Quick Fil® (Only for Sevoflurane), Pour fill
Mounting	Selectatec® type, Tool free installation
Operating flow range	0.2 to 15 Litres/min
Capacity	MAX: 250 ml Nominal MIN: 35 ±10 ml
Dial Range	Sevoflurane 0-8%, Isoflurane 0-5%, Halothane 0-5%, Enflurane 0-5% & 0-8%

Environmental Specifications

Operation system	
Temperature	10°C to 40°C
Humidity	15% to 95%, non-condensing
Altitude	70 kPa to 106 kPa
Storage system	
Temperature	-20°C to 55°C
Humidity	10% to 95%, non-condensing
Altitude	0-5000 m/ 54-101 kPa
Quality standard	
Valid CE Certificate of the offered model can be provided as required.	

A Global Medical Technology Company

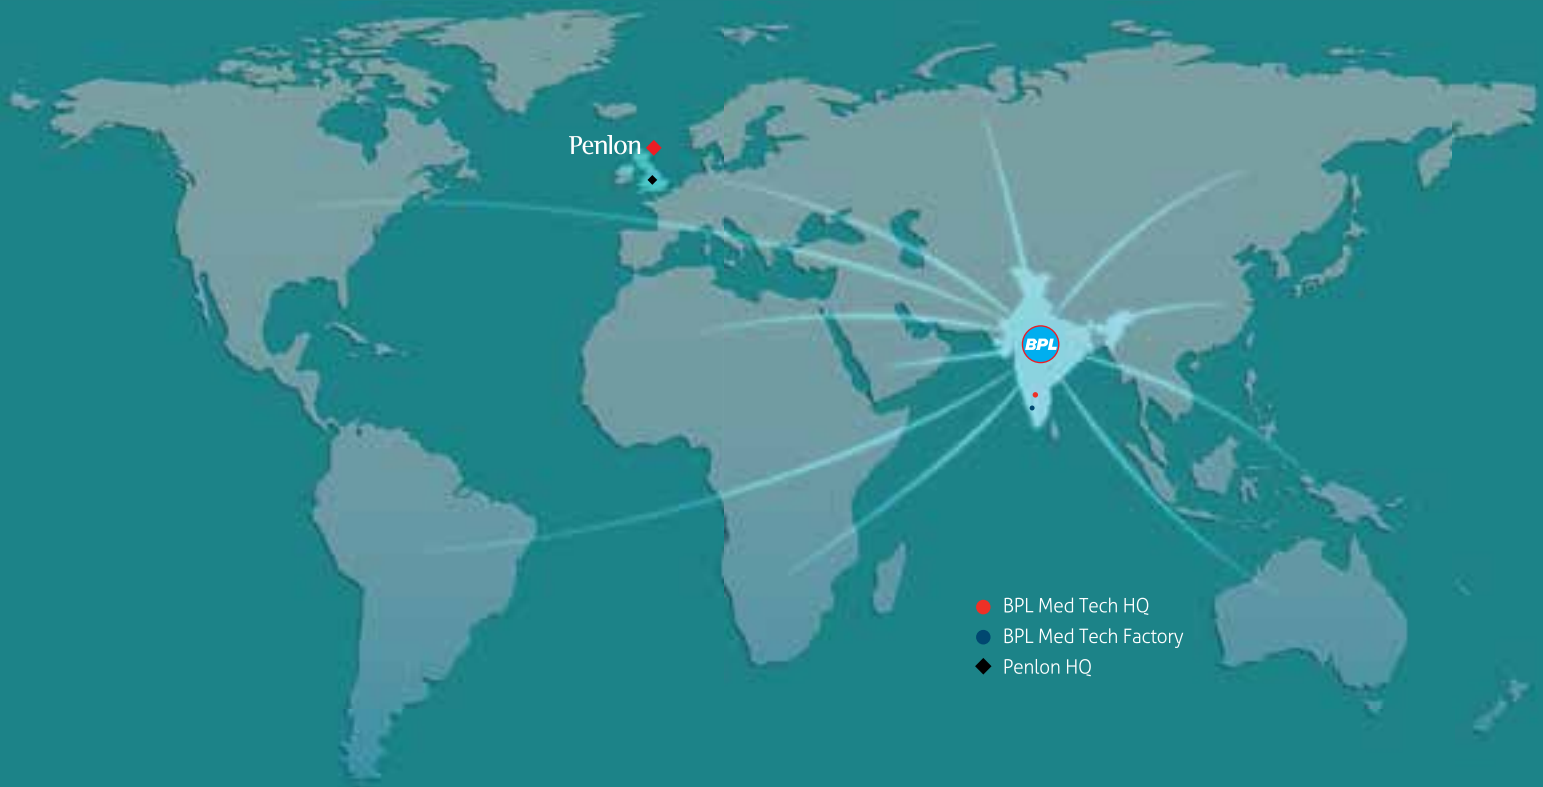

Service is Powered by:



Service Helpline
1800-425-2355

CERTIFIED ISO 13485 : 2016 COMPANY

BPL Medical Technologies Private Limited

Regd. Office: 11th KM, Bannerghatta Road,
Arakere, Bangalore - 560076, India.

Toll Free: 1800-4252355

Website: www.bplmedicaltechnologies.com

For Enquiries: sales.medical@bpl.in

CIN: U33110KA2012PTC067282



ALWAYS USE GENUINE BPL
CONSUMABLES AND
ACCESSORIES FOR
BETTER PERFORMANCE

Follow us on

